


Angulos

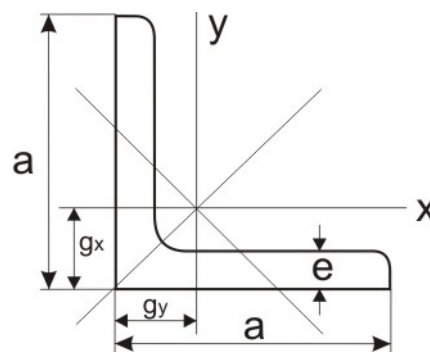

	Dimensiones			Sección	Peso	Valores estáticos		
	a	e	xg=yg	F	g	Jx=Jy	J1	J2
	mm	mm	cm	cm ²	kg/m	cm ⁴	cm ⁴	cm ⁴
5/8" x 1/8	15.9	3.2	0.51	0.91	0.7	0.20	0.09	0.31
3/4 x 1/8	19.1	3.2	0.58	1.11	0.9	0.37	0.17	0.57
7/8 x 1/8	22.2	3.2	0.66	1.31	1.0	0.58	0.31	0.94
1x 1/8	25.4	3.2	0.75	1.51	1.2	0.91	0.38	1.44
1 x 3/16	25.4	4.8	0.81	2.19	1.7	1.26	0.55	1.96
1 1/4 x 1/8	31.8	3.2	0.91	1.92	1.5	1.84	0.74	2.93
1 1/4 x 3/16	31.8	4.8	0.97	2.80	2.2	2.58	1.08	4.07
1 1/2 x 1/8	38.1	3.2	1.07	2.32	1.8	3.24	1.30	5.17
1 1/2 x 3/16	38.1	4.8	1.13	3.40	2.7	4.56	1.86	7.26
1 1/2 x 1/4	38.1	6.4	1.18	4.44	3.5	5.76	2.43	9.09
1 3/4 x 1/8	44.5	3.2	1.23	2.73	2.1	5.23	2.11	8.35
1 3/4 x 3/16	44.5	4.8	1.29	4.00	3.1	7.44	3.03	11.84
2 x 1/8	50.8	3.2	1.39	3.13	2.5	7.91	3.18	12.64
2 x 3/16	50.8	4.8	1.45	4.61	3.6	11.33	4.61	18.05
2 x 1/4	50.8	6.4	1.50	6.05	4.8	14.45	5.93	22.96
2 1/4 x 3/16	57.2	4.8	1.60	5.21	4.1	16.32	6.52	26.12
2 1/4 x 1/4	57.2	6.4	1.68	6.85	5.4	21.01	8.62	33.40
2 1/2 x 3/16	63.5	4.8	1.76	5.82	4.6	22.75	9.22	36.28
2 1/2 x 1/4	63.5	6.4	1.82	7.66	6.0	29.30	12.00	46.59
3 x 1/4	76.2	6.4	2.14	9.27	7.3	51.74	20.90	82.58
3 x 5/16	76.2	7.9	2.20	11.47	9.0	62.93	25.83	100.03
3 x 3/8	76.2	9.5	2.26	13.60	10.7	73.21	30.21	116.21
3 1/2 x 1/4	88.9	6.4	2.46	10.89	8.6	83.62	33.76	133.47
3 1/2 x 5/16	88.9	7.9	2.51	13.49	10.6	101.85	41.28	162.42
3 1/2 x 3/8	88.9	9.5	2.57	16.02	12.6	119.00	48.44	189.55
4 x 1/4	101.6	6.4	2.75	12.48	9.8	124.24	50.03	198.44
4 x 5/16	101.6	7.9	2.84	15.50	12.2	154.61	62.54	246.68
4 x 3/8	101.6	9.5	2.90	18.44	14.5	181.12	73.80	288.43
4 x 1/2	101.6	12.7	3.00	24.19	19.0	231.61	95.79	367.43